




HIGHNESS™

32" SURGICAL DISPLAY

- ◆ Full HD LED
- ◆ Large screen display for extended surgical site view
- ◆ CE, ISO, RoHS Complaint
- ◆ PIP Function

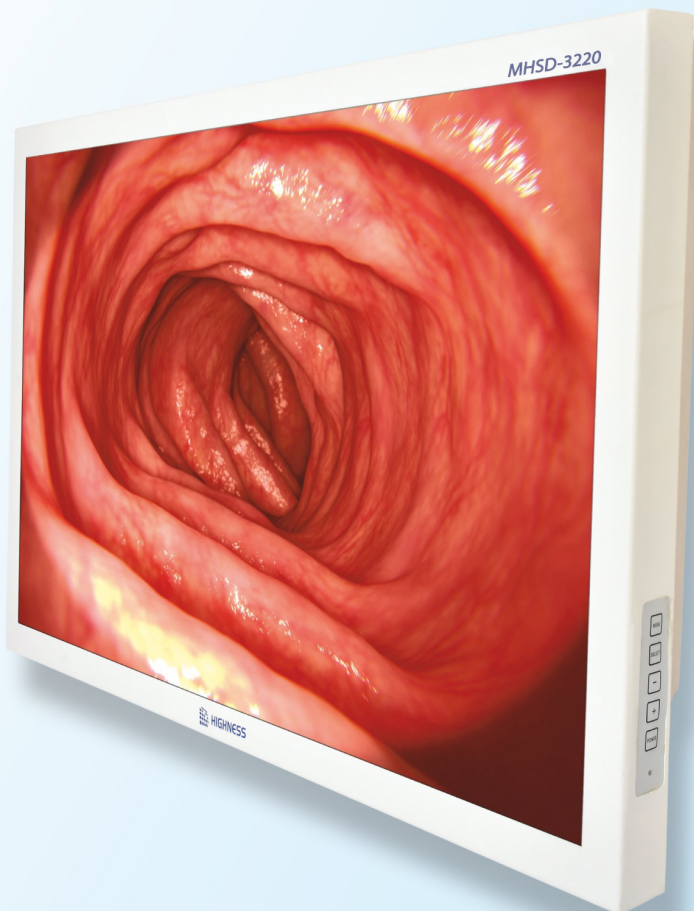

Applications:

- Laparoscopy
- GI Endoscopy
- Bronchoscopy
- Surgical Microscopy
- Arthroscopy
- Neuro-Spine Surgery
- Digital OR

MHSD-3220

Ver.2



TECHNICAL SPECIFICATIONS

Model	MHSD-3220
Screen Technology	TFT AM LCD
Active Screen Size (Diagonal)	32"
Active Screen Size (H x V)	698.4 x 392.85 mm
Aspect Ratio	16:9
Resolution	1920 x 1080
Pixel Pitch	0.3637 mm
Viewing Angle (H, V)	178°, 178°
Maximum Luminance	500 cd/m ²
Contrast Ratio	3000:1
Color	16.7 Millions
Response Time (Tr + Tf)	10 ms
Video Inputs Signals	Digital Signal :- 3G-SDI & DVI Analog Signal :- VGA, CVBS & S-Video Digital Input :- BNC & DVI
Interface Port	Analog Video :- 15 Pin D-Sub, RCA & Mini Din Digital Output :- BNC
Video Outputs Signals	Digital Signal :- 3G-SDI
Other Mode	PIP
Power Requirements (Nominal)	AC 230~240V
Power Consumption (Nominal)	70W Max
Power Saving	EPA, VESA Standard
Operating Temperature	0 to +50°C
Storage Temperature	-20 to +60°C
Relative Humidity	10% to 90% (Non Condensing)
Housing Color	White
Housing Material	Metal
Mounting Standard	Wall Mount / VESA (100 mm)
Supplied Accessories	Video Cable (VGA, DVI, S-Video, BNC & Power Cord)
Warranty	2 Years
Applications	Laparoscopy, GI Endoscopy, Bronchoscopy, Surgical Microscopy, Arthroscopy, Neuro-Spine Surgery, Digital OR

HIGHNESS MICROELECTRONICS PVT. LTD.



Available at:

XAVIER Med Pvt. Ltd.

1-10-51/2, Road 6B, Dwarakapuram,
Dilsukhnagar, Hyderabad - 500060

www.buyxavier.com

Customer Care: 8008895680

Service: 8008895079



An ISO 9001:2015 Company. Copyright @ 2019 Highness Microelectronics Pvt. Ltd. All Rights Reserved.

All images are for representation purpose only. All images and content are copyrighted & copy, reprint or reproduction without written permission prohibited.